


DUCTING HOSE

S MAX P7L PU

Medium weight and flexible polyurethane ducting

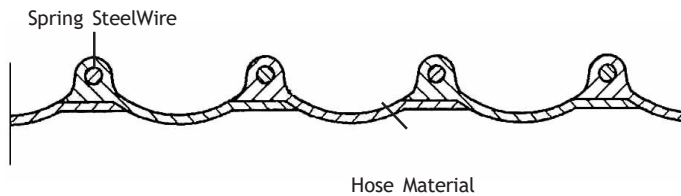

MATERIAL	Polyester-Polyurethane
TEMPERATURE RESISTANCE	- 40°C up to + 100°C
SINGLE LENGTH	10 and 15 m.
COLOUR	Clear
APPLICATIONS	Suction and conveying of abrasive particles or granules
PROPERTIES	Very smooth bore, good abrasion resistance, resistant to oil and petrols. non toxic free of halogen and softeners.

DIAMETER (mm)	WEIGHT (kg/m)	BENDING RADIUS (mm)	MAX. WORK. PRESS. (bar)	MAX. VACUUM (bar)
25	0.21	25	1.40	0.40
32	0.25	30	1.30	0.30
38	0.40	40	1.15	0.40
51	0.45	50	1.00	0.25
63	0.48	60	1.00	0.25
76	0.60	75	1.00	0.20
80	0.65	80	0.80	0.20
90	0.73	90	0.80	0.18
102	0.84	100	0.60	0.18
115	0.92	110	0.60	0.15
127	0.98	125	0.50	0.10
140	1.06	140	0.40	0.10
152	1.12	150	0.38	0.10
165	1.20	160	0.35	0.08
178	1.31	175	0.30	0.08
203	1.50	200	0.25	0.05
229	1.85	225	0.20	0.04
254	1.93	250	0.20	0.04
279	2.31	300	0.15	0.02
305	4.25	350	0.10	0.01
381	4.84	400	0.08	0.01
406	5.43	450	0.06	0.01

* Further diameters available upon request. Technical data are based on +23°C