


## DUCTING HOSE

### S MAX P7N PU

Heavy weight and flexible polyurethane ducting

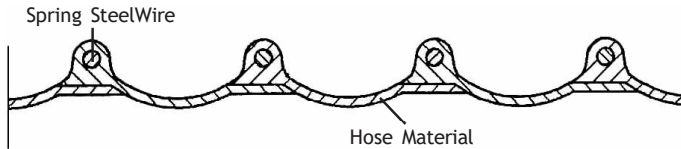

MATERIAL	Polyester-Polyurethane
TEMPERATURE RESISTANCE	- 40°C up to + 100°C
SINGLE LENGTH	10 and 15 m.
COLOUR	Clear
APPLICATIONS	Suction and discharging of abrasive materials
PROPERTIES	Very smooth bore, excellent abrasion resistance, resistant to oil and petrols non toxic, free of halogen and softeners.

DIAMETER (mm)	WEIGHT (kg/m)	BENDING RADIUS (mm)	MAX. WORK. PRESS. (bar)	MAX. VACUUM (bar)
25	0.30	38	3.00	0.90
32	0.38	48	3.00	0.90
38	0.52	57	2.40	0.75
51	0.67	75	1.90	0.60
63	0.79	90	1.80	0.55
76	0.98	113	1.20	0.50
80	1.09	120	1.20	0.45
90	1.23	135	1.10	0.45
102	1.36	150	1.10	0.40
115	1.38	165	1.00	0.35
127	1.54	188	0.80	0.25
140	1.75	210	0.70	0.20
152	1.82	225	0.70	0.20
165	2.15	240	0.60	0.20
178	2.35	263	0.55	0.15
203	2.55	270	0.50	0.15
229	2.92	300	0.50	0.15
254	3.25	338	0.40	0.10
279	3.57	375	0.30	0.10
305	4.31	450	0.30	0.10
381	5.05	525	0.25	0.09
406	5.72	600	0.20	0.09

\* Further diameters available upon request. Technical data are based on +23°C