


BUG SCREEN SIZE	OUTSIDE DIAMETER (MM)
1"	39.4
2"	66.3
3"	94.9
4"	120.3
5"	147.3
6"	174.3
8"	225.1
10"	279.1
12"	329.9

NO.	QTY.	DESCRIPTION	MATERIAL
A	1	PERFORATED SCREEN	ASTM A240 GR. TP316L
B	1	DOUBLE BOLT CLAMP	ASTM A240 GR. TP316L
C	1	COLLAR	ASTM A240 GR. TP316L

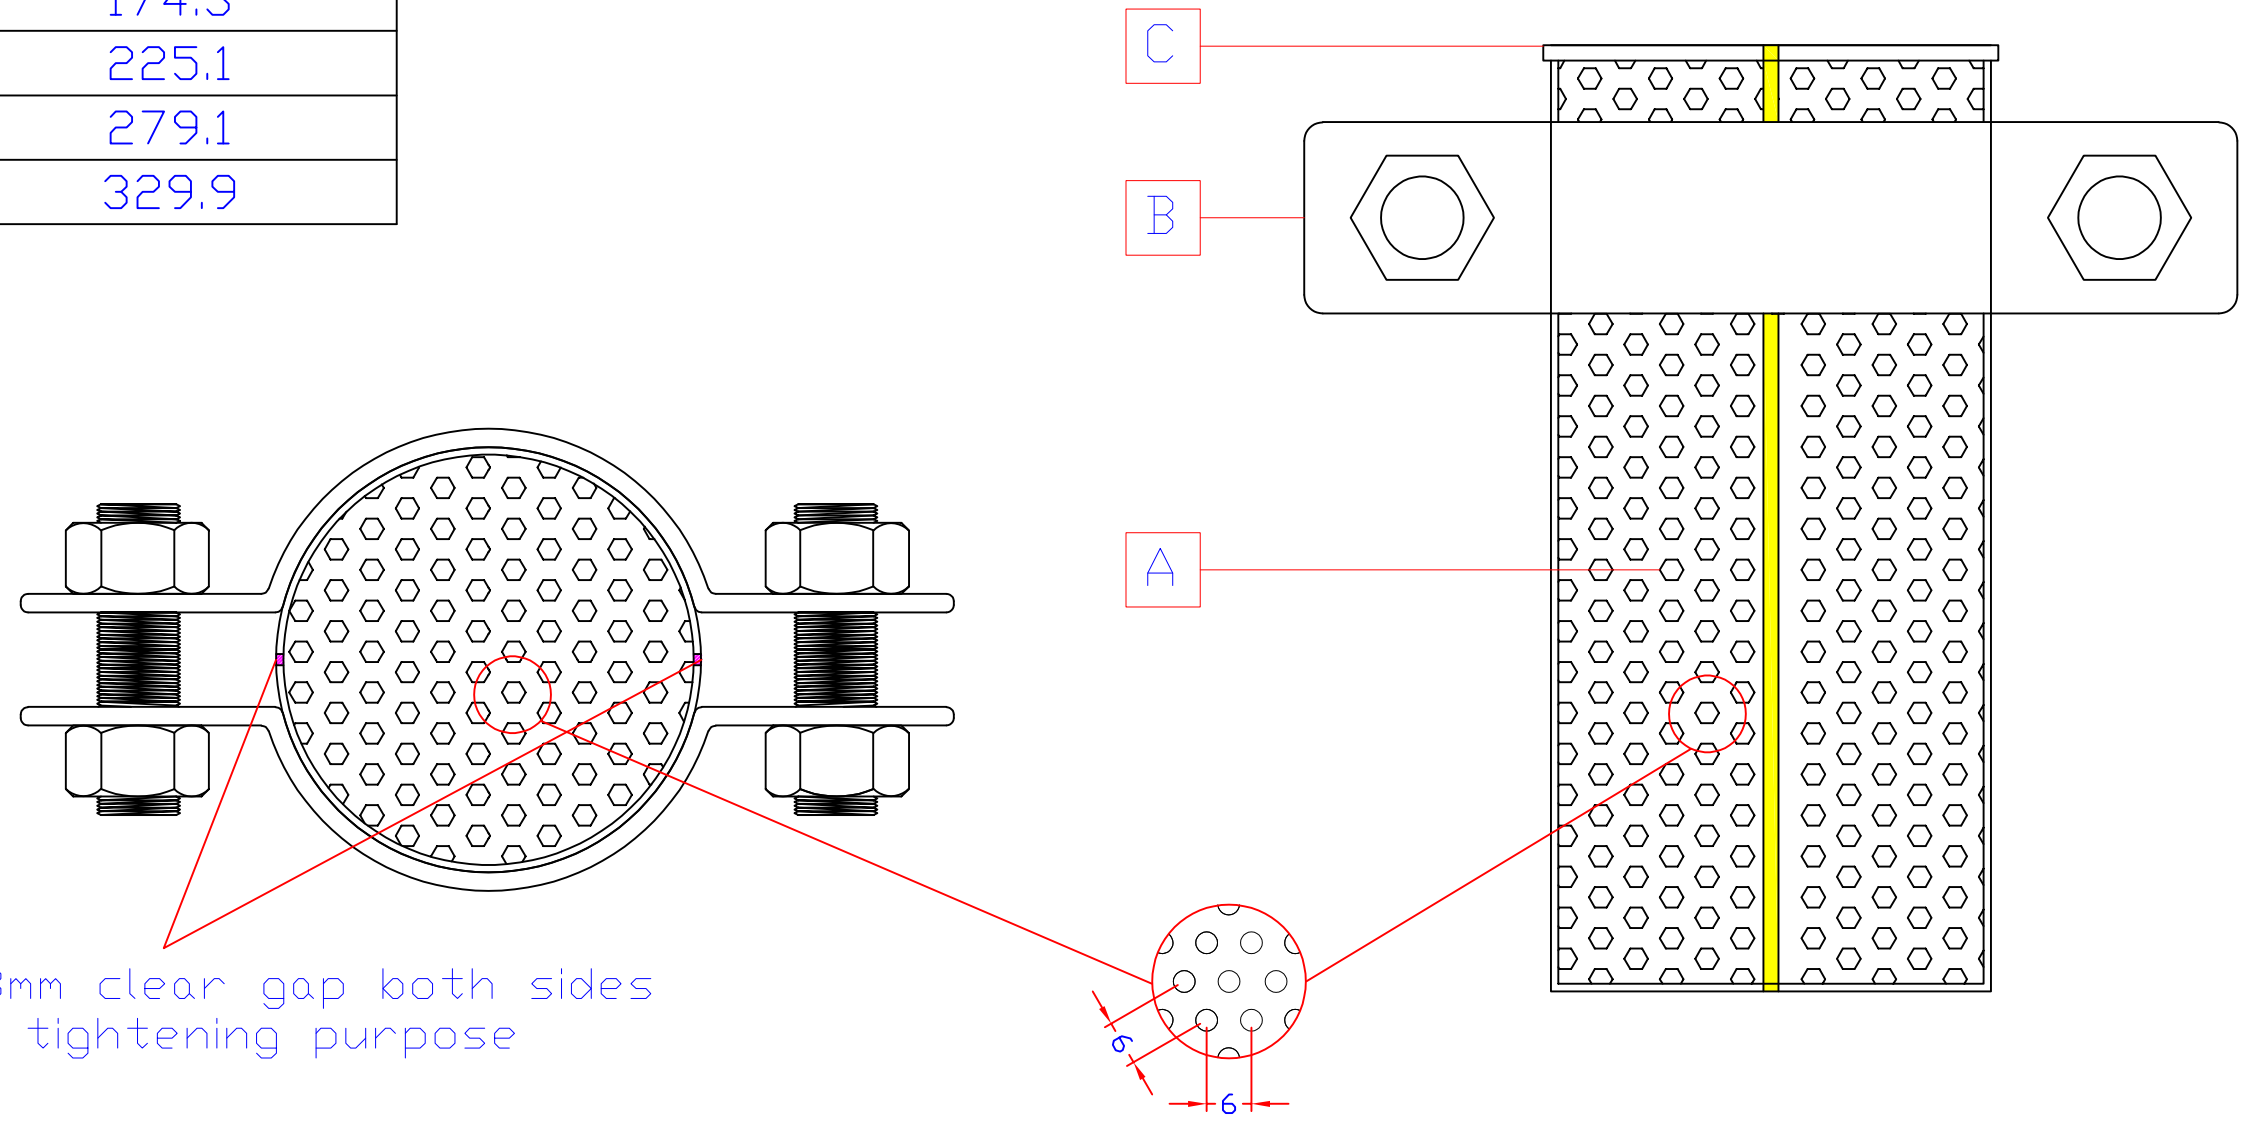

45mm x 3mm clear gap both sides for tightening purpose

N.T.S.

NOTES:
 1. ALL DIMENSION IN 'mm' UNIT.
 2. DESIGN PRESSURE : ATM
 3. DESIGN TEMPERATURE : 60°C
 4. PERFORATED METAL SHEET 3mm (0.125') HOLE DIAMETER, 40% OPENING HOLE SHALL BE STAGGERED THICKNESS OF PLATE GUAGE 14.

REV	DATE	DESCRIPTION
A	09.04.25	Issue For Sample

S.MAX OFFSHORE & MARINE PTE. LTD. (2007098032)
 No. 682D, Woodlands Drive 73, #12-235, Singapore 734682.
 H/P No.: +65 9797 0231

06.11.24	IQA	WHM	DL		
DATE:	DRAWN:	CHKD:	APPD:	CHKD:	APPD:

ITEM NO. **BUG SCREEN**

DRAWING NO. **SY-DLRF-SAMPLE** SCALE: **NTS** REV: **A**